


SCREEN BETTER

Cobra-Vibe™



- Wires vibrate independently for maximum self-cleaning action
- High density polyurethane strips increase wear life and result in fewer change-outs
- Customized to your specific screening requirements

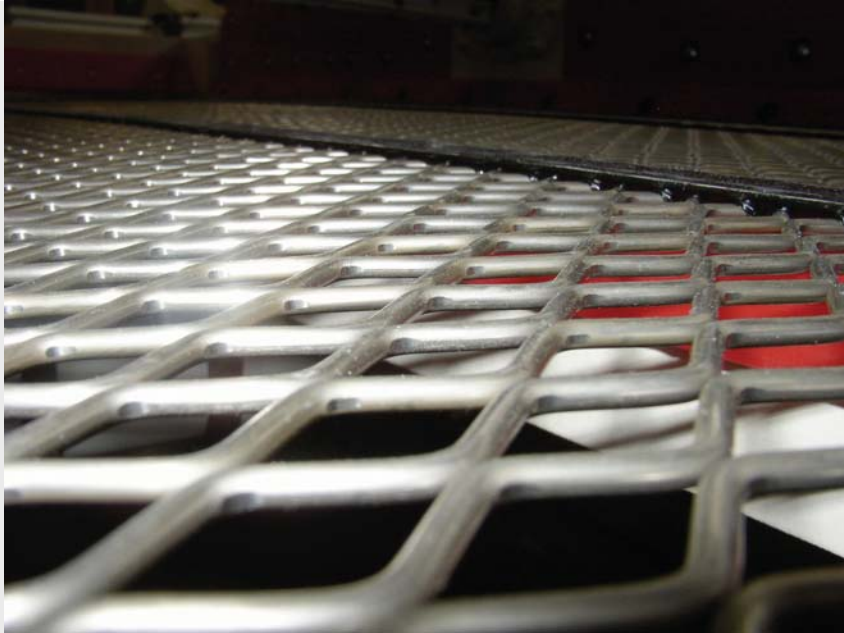

BEFORE

Traditional wire cloth presents blinding and pegging problems with wet or sticky material.



AFTER

Using independently vibrating warp wires, Cobra-Vibe significantly reduces blinding and pegging in many applications. No deck modification is required.

1-800-325-5993

www.wstyler.ca

SCREEN BETTER




Cobra Vibe™ Quotation

Customer:	Phone:
Location:	Fax:
Contact:	Date:
PO #	Tyler Rep:

Specification	Cobra Vibe Pattern
Opening:	<input type="checkbox"/> PT Triangle <input type="checkbox"/> PH Herringbone
Wire Diameter:	<input type="checkbox"/> PQ Square <input type="checkbox"/> PM Slotted
Material:	

Screen Dimensions 	Tensioning <input type="checkbox"/> Side Tensioning <input type="checkbox"/> End Tensioning	Type of Hook <input type="checkbox"/> A-Hook <input type="checkbox"/> Other
	Hook Set-Up <input type="checkbox"/> Same Direction <input type="checkbox"/> One Up/One Down	

Width: <input type="checkbox"/> OH <input type="checkbox"/> IH	Location of Bar Rails
Length:	From Side:
Extension: <input type="checkbox"/> YES <input type="checkbox"/> NO	A1
Center Hold Down: <input type="checkbox"/> YES <input type="checkbox"/> NO	A2
If Yes, Hole Diameter:	A3
Hole Spacing: (T1 – TX):	A4
	A5
	A6
	A7
	A8
	A TO END

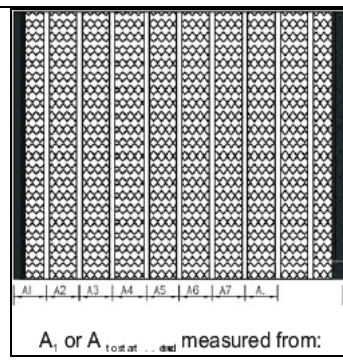

Specification Opening Range			
PH	PQ	PT	PM
0.059" – 0.787"	0.078" – 1.312"	0.035" – 0.787"	0.035" and greater

<input type="checkbox"/> OH/IH	<input type="checkbox"/> Sidewall
--------------------------------	-----------------------------------

www.wstyler.ca